



LEISTUNGSERKLÄRUNG



Nr. 0085 – DE

1. Eindeutiger Kenncode des Produkttyps: **fischer Highbond-Anker FHB**

2. Verwendungszweck(e):

Produkt	Verwendungszweck (e)
Verbundanker zur Verwendung in Beton	Verankerungen, die Anforderungen an die mechanische Festigkeit und Standsicherheit sowie Nutzungssicherheit erfüllen. Sie dienen zur Befestigung und/oder Verankerung von Tragwerksteilen (die zur Stabilität der Systeme beitragen) oder schweren Elementen, siehe Anhang, insbesondere Anhänge B 1 bis B 4

3. Hersteller: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Deutschland**

4. Bevollmächtigter: --

5. System(e) zur Bewertung und Überprüfung der Leistungsbeständigkeit: **1**

6a. Harmonisierte Norm: ---

Notifizierte Stelle(n): ---

6b. Europäisches Bewertungsdokument: **ETAG 001; 2013-04**

Europäische Technische Bewertung: **ETA-06/0171; 2016-04-20**

Technische Bewertungsstelle: **DIBt**

Notifizierte Stelle(n): **1343 – MPA Darmstadt**

7. Erklärte Leistung(en):

**Mechanische Festigkeit und Standsicherheit (BWR 1)**

Wesentliches Merkmal	Leistung
Charakteristischer Widerstand	Siehe Anhang, insbesondere Anhänge C 1 bis C 3
Verschiebungen unter Zug- und Querbeanspruchung	Siehe Anhang, insbesondere Anhang C 3

**Brandschutz (BWR 2)**

Wesentliches Merkmal	Leistung
Brandverhalten	Der Dübel erfüllt die Anforderungen der Klasse A 1
Feuerwiderstand	KLF

8. Angemessene Technische Dokumentation und/oder Spezifische Technische Dokumentation: ---

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2016-04-29

- Diese Leistungserklärung wurde in verschiedenen Sprachversionen erstellt. Für den Fall unterschiedlicher Auslegung hat immer die englische Version Vorrang.
- Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache. Diese gehen über die (sprachneutral angegebenen) gesetzlichen Anforderungen hinaus.

**Specific Part**

**1 Technical description of the product**

The fischer Highbond-anchor FHB is a torque controlled bonded anchor consisting of a mortar cartridge with FIS HB and an anchor rod with hexagon nut and washer. The anchor rod (including nut and washer) is made of galvanised steel.

The load transfer is realised by mechanical interlock of several cones in the bonding mortar and then via a combination of bonding and friction forces in the anchorage ground (concrete).

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment**

**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance	See Annex C 1 to C 3
Displacements under tension and shear loads	See Annex C 3

**3.2 Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

**3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

**3.4 Safety in use (BWR 4)**

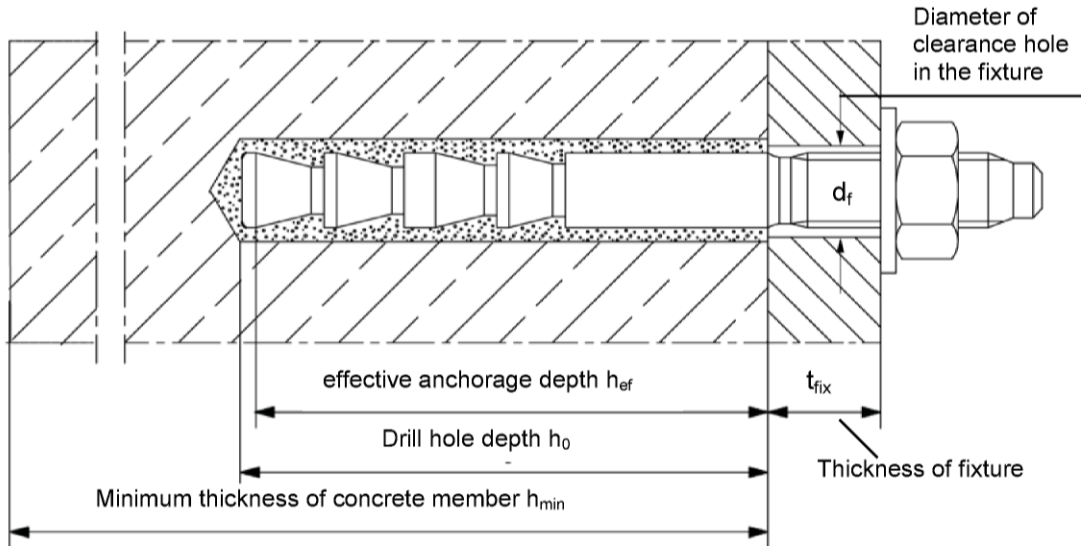
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 001, April 2013, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**Installation conditions**



fischer Highbond-anchor FHB

**Product description**  
Installation conditions


**Annex A 1**

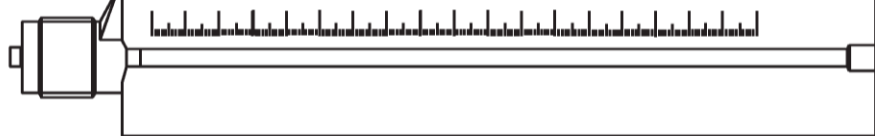**Mortar cartridge sizes FIS HB (360 ml or 150 ml)**


Sealing cap




**Imprint:** fischer FIS HB, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume



**Static mixer FIS MR or UMR**

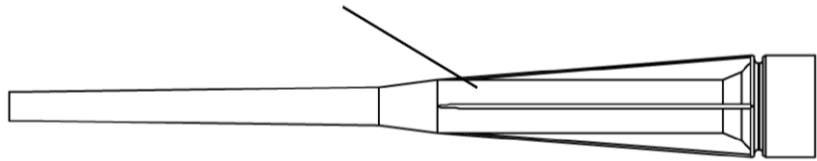

**Highbond-anchor FHB**

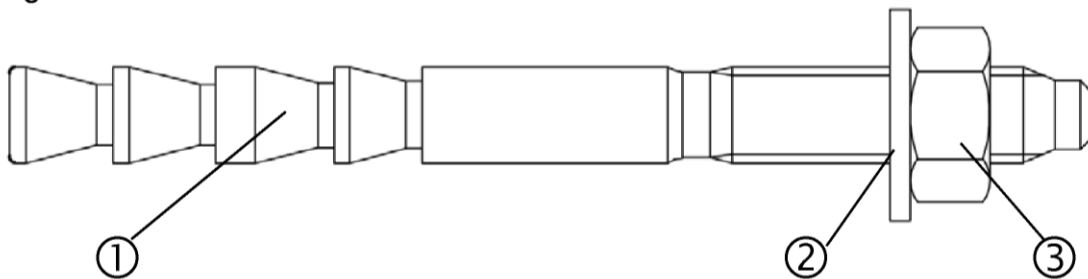

**Table A1: Materials**

Part	Designation	M10 to M16	M20 to M24
1	Anchor rod FHB-A	Steel $f_{uk} = 800 \text{ N/mm}^2$ $f_{yk} = 640 \text{ N/mm}^2$ (ISO 898-1: 2013) zinc plated $\geq 5\mu\text{m}$ , (EN ISO 4042:1999 A2K) $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation coated	Steel $f_{uk} = 550 \text{ N/mm}^2$ $f_{yk} = 440 \text{ N/mm}^2$ (ISO 898-1: 2013) zinc plated $\geq 5\mu\text{m}$ , (EN ISO 4042:1999 A2K) $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation coated
2	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$ , EN ISO 4042:1999 A2K	
3	Hexagon nut	Property class 8;(EN ISO 898-2:2013), zinc plated $\geq 5\mu\text{m}$ ,(ISO 4042:1999 A2K)	

fischer Highbond-anchor FHB



**Product description**

Cartridge/ static mixer/ anchor rod with hexagon nut and washer  
Materials

**Annex A 2**

**Specifications of intended use**

**Table B1:** Overview use categories and performance categories

Anchorages subject to		<b>FIS HB with</b>	
		fischer Highbond-anchor FHB	
			
Hammer drilling		all sizes	
Static and quasi static load, in	uncracked concrete	all sizes	Tables:C1; C2; C3; C4
	cracked concrete		
Use category	dry and wet concrete	all sizes	
	flooded hole	all sizes	
Installation temperature		-5°C to +40°C	
In-service temperature	Temperature range	-40°C to +80°C	(Maximum short term temperature +80°C and maximum long term temperature +50°C)

**Base materials:**

- Reinforced or unreinforced normal weight concrete Strength classes C20/25 to C50/60 according to EN 206-1:2000

**Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions

**Design:**

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static are designed in accordance with:
  - EOTA ETAG 001, Annex C, Design method A 08/2010

**Installation:**

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar
- Keeping the effective anchorage depth
- Overhead installation is allowed

fischer Highbond-anchor FHB


**Intended Use**  
Specifications

**Annex B 1**

**Table B2:** Installation parameters for anchor rods FHB - A

Size		FHB – A 10x60	FHB – A 12x80	FHB – A 12x100	FHB – A 16x125	FHB – A 20x170	FHB – A 24x220
Width across flat	SW	17	19		24	30	36
Nominal drill bit diameter	$d_0$	12	14		18	24	28
Drill hole depth	$h_0$	65	85	105	130	175	225
Embedment depth of anchor	$l_d$	62	82	102	128	175	225
Effective anchorage depth	$h_{ef}$	60	80	100	125	170	220
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$	60	80	100	100	150	180
Diameter of clearance hole in the fixture <sup>1)</sup>	$d_f$	12	14		18	22	26
Minimum thickness of concrete member	$h_{min}$	120	160	200	250	340	440
Maximum installation torque	$T_{inst,max}$ [Nm]	20	40		60	100	120
Corresponding steel brush	$d_b$ [mm]	13	16		20	26	30
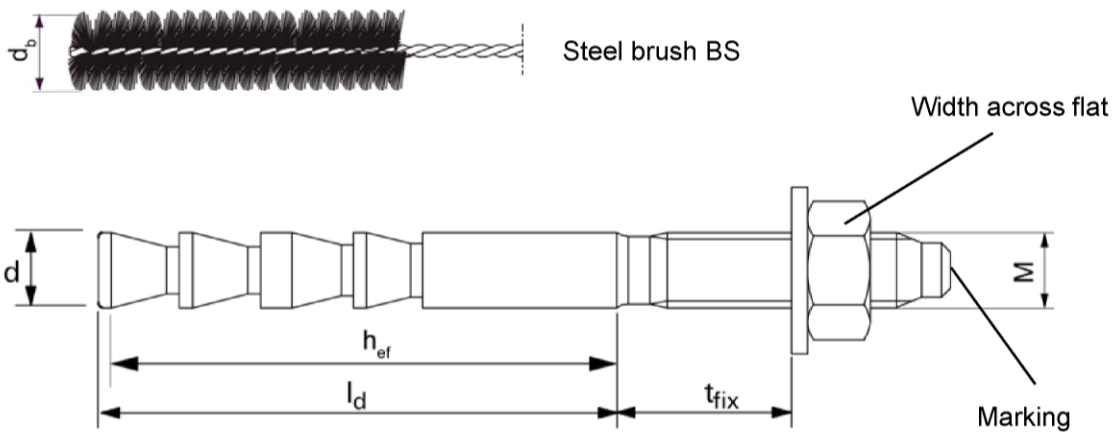
<sup>1)</sup> For larger clearance holes in the fixture see EOTA ETAG 001, Annex C, 08/2010



**Marking:** Work symbol; size, anchorage depth  $h_{ef}$ ;

e.g.:  16 x 125

fischer Highbond-anchor FHB

**Intended Use**

Installation parameters for anchor rods FHB - A

**Annex B 2**

**Table B3: Maximum processing times and minimum curing times**

Concrete temperature <sup>3)</sup> [°C]	Maximum processing times $t_{work}$ <sup>2)</sup> [minutes]	Minimum curing times $t_{cure}$ <sup>1)</sup> [minutes]
-5 to 0	--	360
>+1 to +5	--	180
>+6 to +10	15	90
>+11 to +20	6	35
>+21 to +30	4	20
>+31 to +40	2	12

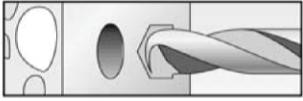
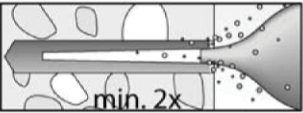
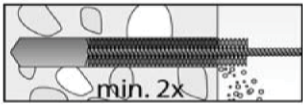

<sup>1)</sup> In wet concrete or flooded hole the curing times must be doubled.

<sup>2)</sup> The temperature of the mortar may not fall below +5°C.

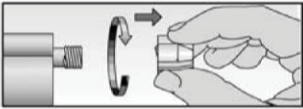

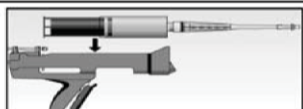
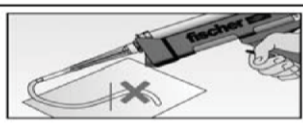
<sup>3)</sup> During the curing of the mortar the temperature of the concrete may not fall below -5°C.

**Installation instructions (Part 1)**

**Drilling and cleaning the hole**

1		Drill the hole. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Table B2</b> .
2		Blow out the drill hole twice. For anchor size $\geq$ M20 use oil free compressed air ( $\geq$ 6bar). For this use a pressure nozzle $\varnothing$ 19 mm.
3		Brush the hole twice using a steel brush. Corresponding steel brushes see <b>Table B2</b>
4		Blow out the drill hole twice. For anchor size $\geq$ M20 use oil free compressed air ( $\geq$ 6bar). For this use a pressure nozzle $\varnothing$ 19 mm.

**Preparing the cartridge**

5		Remove the sealing cap (do not use the sealing cap again)
6		Screw on the static mixer (the spiral in the static mixer must be clearly visible). Never use the mortar cartridge without a static mixer.
7		Place the cartridge into the dispenser
8		Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey

fischer Highbond-anchor FHB

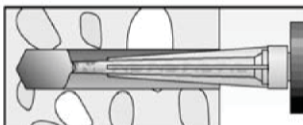
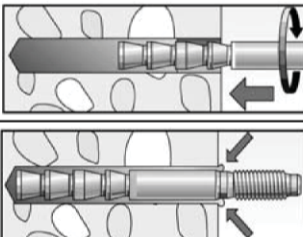

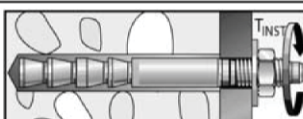
**Intended Use**  
Working times and curing times  
Installation instructions (Part 1)

**Annex B 3**



**Installation instructions (Part 2)**

**Installation of anchor rods FHB-A**

9		<p>Observe the working time (<math>t_{work}</math>) of the mortar<sup>1)</sup> (see <b>Table B3</b>).                  Fill approx. 2/3 of the drill hole with mortar FIS HB. Always begin from the bottom of the hole and avoid bubbles (exact quantity of the mortar see installation instruction of the manufacturer).</p>
10		<p>Insert the Highbond- anchor rod FHB-A to the bottom of the mortar- filled bore hole (setting depth), turning it slightly while doing so.</p> <p>After inserting the anchor element, excess mortar must emerge around the anchor element</p>
		<p>For overhead installations support the anchor rod with wedges. (e.g. fischer centering wedges)</p>
11		<p>Observe the curing time (<math>t_{cure}</math>) of the mortar (see <b>Table B3</b>).                  Screw on the fixture and for installation check generate the correct torque moment (<math>t_{inst,max}</math>) (see <b>Table B2</b>)</p>

<sup>1)</sup> If the working time has elapsed (work stoppage), use a new static mixer and, if necessary, remove crusted material on the mouth of the cartridge.

fischer Highbond-anchor FHB	<b>Annex B 4</b>
<p><b>Intended Use</b>                  Installation instructions (Part 2)</p>	

<b>Table C1: Characteristic values of steel bearing capacity under tensile / shear load</b>								
<b>Size FHB- A</b>			<b>10x60</b>	<b>12x80</b>	<b>12x100</b>	<b>16x125</b>	<b>20x170</b>	<b>24x220</b>
<b>Tensile load, steel failure</b>								
Characteristic resistance	$N_{Rk,s}$	[kN]	26	44	44	82	131	180
<b>Partial safety factor<sup>1)</sup></b>								
Partial safety factor	$\gamma_{Ms,N}$	[-]	1,50					
<b>Shear load, steel failure</b>								
<b>Without lever arm</b>								
Characteristic resistance	$V_{Rk,s}$	[kN]	16	30	30	55	60	85
<b>With lever arm</b>								
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	60	105	105	266	357	617
<b>Concrete edge failure</b>								
<b>Partial safety factor<sup>1)</sup></b>								
Partial safety factor	$\gamma_{Ms,V}$	[-]	1,25					
<sup>1)</sup> In absence of other national regulations								
fischer Highbond-anchor FHB							<b>Annex C 1</b>	
<b>Performances</b> Steel bearing capacity								

**Table C2: General design factors for the bearing capacity under tensile / shear load; uncracked or cracked concrete**

Size		All Sizes						
<b>Bearing capacity under tensile load</b>								
<b>Factors for the compressive strength of concrete &gt; C20/25</b>								
Increasing factor for $\tau_{Rk}$	C30/37	$\Psi_c$	[-]	1,22				
	C40/50			1,41				
	C50/60			1,55				
<b>Splitting failure or concrete cone failure</b>								
Edge distance	$C_{cr,sp}$ = $C_{cr,N}$	[mm]	1,5 $h_{ef}$					
Spacing	$S_{cr,sp}$ = $S_{cr,N}$		3,0 $h_{ef}$					
<b>Bearing capacity under shear load</b>								
<b>Concrete pry-out failure</b>								
Factor k acc. to ETAG 001, Annex C, Section 5.2.3.3	k	[-]	2,0					
<b>Concrete edge failure</b>								
The value of $h_{ef}$ (= $l_f$ ) under shear load	[mm]	60	80	100	125	170	220	
Calculation diameters								
Size FHB- A		10x60	12x80	12x100	16x125	20x170	24x220	
	d [mm]	10	12	12	16	20	24	
fischer Highbond-anchor FHB							<b>Annex C 2</b>	
<b>Performances</b> Characteristic values of resistance under static or quasi-static action under shear load								

<b>Table C3: Characteristic values under tension load; uncracked or cracked concrete</b>								
Size FHB-A		10x60	12x80	12x100	16x125	20x170	24x220	
<b>Combined pullout and concrete cone failure</b>								
Calculation diameter	d	[mm]	10	12	16	20	24	
<b>Uncracked concrete</b>								
<b>Characteristic resistance in uncracked concrete C20/25</b>								
Temperature range 50 °C / 80 °C	$N_{Rk,p}$	[N/mm <sup>2</sup> ]	20	25	35	50	60	115
<b>Cracked concrete</b>								
<b>Characteristic resistance in cracked concrete C20/25</b>								
Temperature range 50 °C / 80 °C	$N_{Rk,p}$	[N/mm <sup>2</sup> ]	1)	1)	30	1)	60	95
<b>Installation safety factors</b>								
All installation conditions	$\gamma_2 = \gamma_{inst}$	[-]	1,0					
1) Pullout not decisive								
<b>Table C4: Displacements</b>								
Size FHB-A		10x60	12x80	12x100	16x125	20x170	24x220	
<b>Displacements under tension load</b>								
<b>Uncracked concrete</b>								
Tension load	N	[kN]	9,5	11,9	16,7	23,8	28,6	54,8
Displacements	$\delta_{N0}$	[mm]	0,2	0,2	0,3	0,3	0,5	
	$\delta_{N\infty}$		0,8	0,7	0,7	0,7	1,1	
<b>Cracked concrete</b>								
Tension load	N	[kN]	7,8	12,0	14,3	23,4	28,6	45,2
Displacements	$\delta_{N0}$	[mm]	0,5	0,5	0,6	0,6	0,9	
	$\delta_{N\infty}$		0,8	0,7	0,7	0,7	1,1	
<b>Displacements under shear load</b>								
<b>Uncracked or cracked concrete</b>								
Shear load	V	[kN]	9,3	17,0	31,6	33,9	48,8	
Displacements	$\delta_{V0}$	[mm]	1,3					
	$\delta_{V\infty}$		2,0					
fischer Highbond-anchor FHB							<b>Annex C 3</b>	
<b>Performances</b>								
Characteristic values under tension load Displacements								